


---

Item no.:	222-412
Product description:	Compact splicing connector 2-conductor terminal block with operating levers max. continuous service temperature 85°C

---

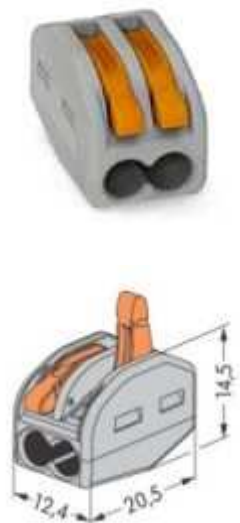

Packing unit 1000 10\*100 pieces

Product group	7 (Push Wire Conn.)
Cross section [mm <sup>2</sup> ]	0.08 - 2.5 mm <sup>2</sup>
Cross section [AWG]	28 - 14 AWG
Wiring method	s + f-st
Connection method	CAGE CLAMP®CONNECTION
Cross section [mm <sup>2</sup> ]	0.08 - 4 mm <sup>2</sup>
Cross section [AWG]	28 - 12 AWG
Wiring method	f
Measured voltage EN	400 V
Measured shock voltage	4 kV
Pollution degree	2
Current intensity EN	32 A
Weight	3.072 g
Color	grey

Wiring type	Side-entry
No. of connection Points	2
No. of potentials	1
Height	14.5 mm
Height	0.571 in
Width	12.4 mm
Width	0.488 in
Depth	20.5 mm
Depth	0.807 in
Strip length from	9 mm
Strip length to	10 mm
Strip length	0.37 in
Country of Origin	Deutschland

© WAGO Kontakttechnik GmbH & Co. KG  
Specifications are subject to changes and errors